


Oil Pattern Distance	46	Reverse Brush Drop	45	Oil Per Board	50 ul
Forward Oil Total	18.5 mL	Reverse Oil Total	7.7 mL	Volume Oil Total	26.2 mL
Tank Configuration	A Only	Tank A Conditioner	ICE	Tank B Conditioner	FIRE

	START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	4L	4R	1	10	A	33	0.0	0.0	0.0	1650
2	5L	5R	2	10	A	62	0.0	2.8	2.8	3100
3	6L	6R	3	14	A	87	2.8	8.7	5.9	4350
4	7L	7R	3	14	A	81	8.7	14.6	5.9	4050
5	10L	10R	3	18	A	63	14.6	22.2	7.6	3150
6	15L	15R	4	18	A	44	22.2	32.4	10.2	2200
7	2L	2R	0	22	A	0	32.4	46.0	13.6	0

	START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	26	A	0	46.0	40.0	-6.0	0
2	13L	13R	2	22	A	30	40.0	33.8	-6.2	1500
3	11L	11R	3	22	A	57	33.8	24.5	-9.3	2850
4	10L	10R	2	22	A	42	24.5	18.3	-6.2	2100
5	8L	8R	1	22	A	25	18.3	15.2	-3.1	1250
6	2L	2R	0	14	A	0	15.2	0.0	-15.2	0

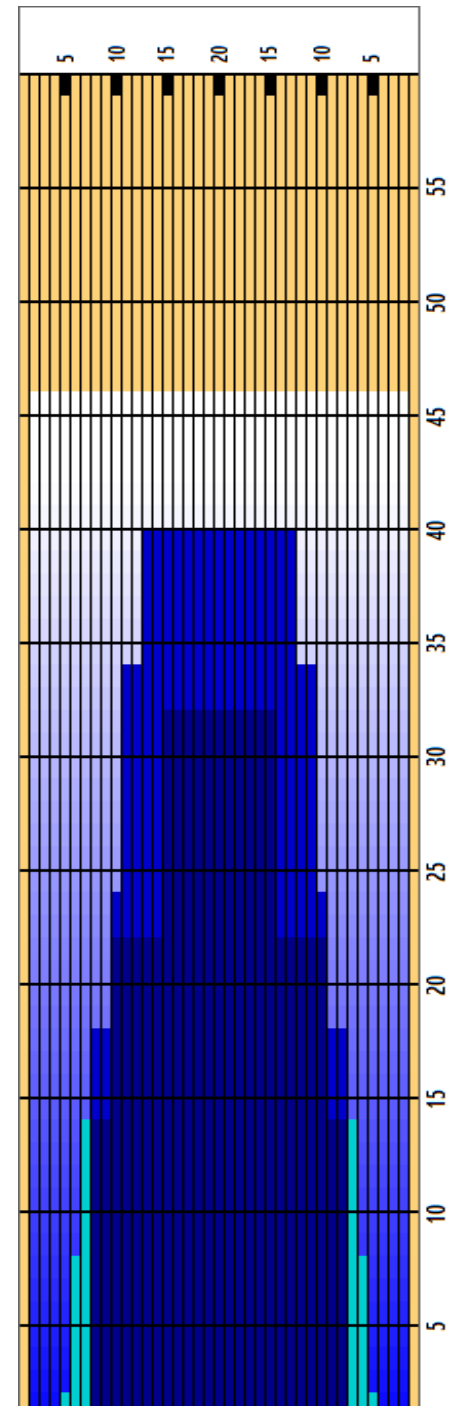

Cleaner Ratio Main Mix NA Forward
 Cleaner Ratio Back End Mix NA Reverse
 Cleaner Ratio Back End Distance NA Combined
 Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 100



--

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside:Middle	Middle:Middle	Inside:Middle	Middle: Inside	Middle:Middle	Middle:Outside
Track Zone Ratio	6.32	1.69	1.07	1.07	1.69	6.32

